
Foldable Maintenance Platform

- Swing-out guardrail with safety pin, slip-resistant floor with drainage holes at the bottom and crash barrier which ensure safety;
- Manned platform is fixed to the forklift by safety pin and chains to ensure safety;
- Easy to dismantle and install; occupies small room for storage;
- Meets European Union PM28 and GN48 safety and health standards.





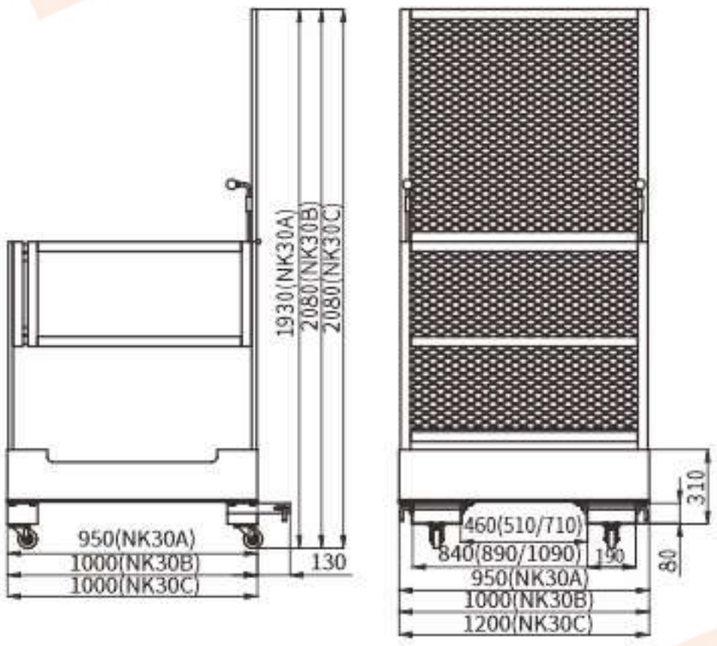


Model		NK30A	NK30B	NK30C
Load Capacity	kg	300	300	300
Net Weight	kg	105	110	120
Deck size	mm	950×950	1000×1000	1000×1200

Bulk bag lifter

- This lifter can lift different types of bags, with strong versatility, and can be used with a wide range of lifting equipment;
- The lifter is easy to use and can be unhooked by itself. It apply to high stacking conditions.



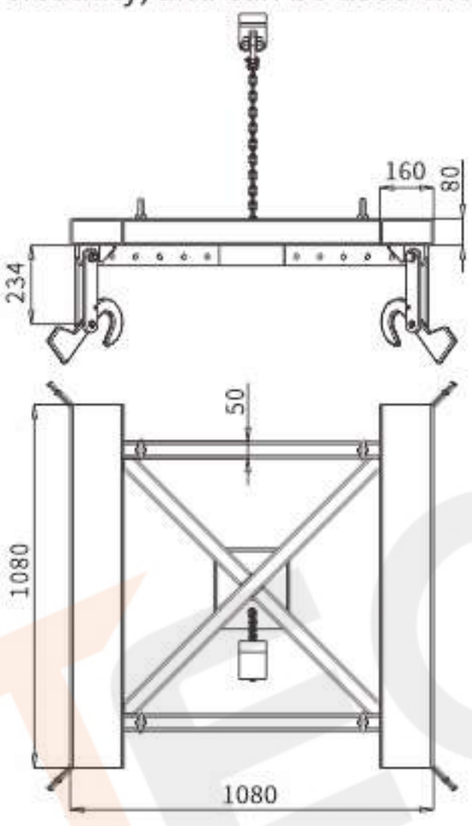



Model		TD2000
Load Capacity	kg	2000
Fork leg size	mm	160×80
Net Weight	kg	135

Container Skipper

- Maunal operation or attach to forklift.
- Easy toppling.
- Releasing cable included.





Model		YL-J150
Load Volume	L	150
Container Size	mm	750×780×500
Wheel	mm	Ø125×2
Castor	mm	Ø125×1
Fork Opening	mm	600
Fork Pockets	mm	150×55
Overall Dimension	mm	1100×780×800
Net Weight	kg	103

Self-Dumping Hopper

- Automatically return and lock when fork upright position.
- Releasing cable included.






Model		YL-J1000	YL-J1000A	YL-J1800	YL-J1800A
Capacity	kg/lbs	1000/2200	1000/2200	1800/4000	1800/4000
Volume	cbm	0.25	0.38	0.25	0.38
Overall Dimensions	mm	1315x965x660	1315x965x840	1315x965x660	1315x965x840
Fork Pocket center	mm	457	457	457	457
Net Weight	kg	110	120	130	145


Fork Hook

- Converts forklift into a mobile crane in seconds;
- Adjustable mounting position along the length of the fork;
- Secured connect to forks by thumb screw;
- Swivel hook includes safety latch.

MK5









MK10 MK25



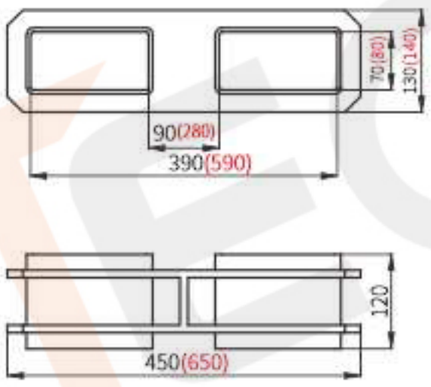


MK40



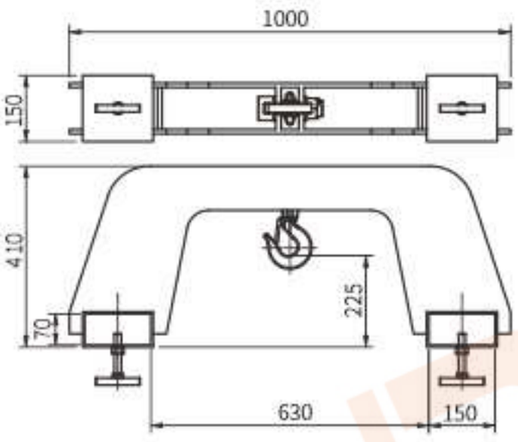

MK50



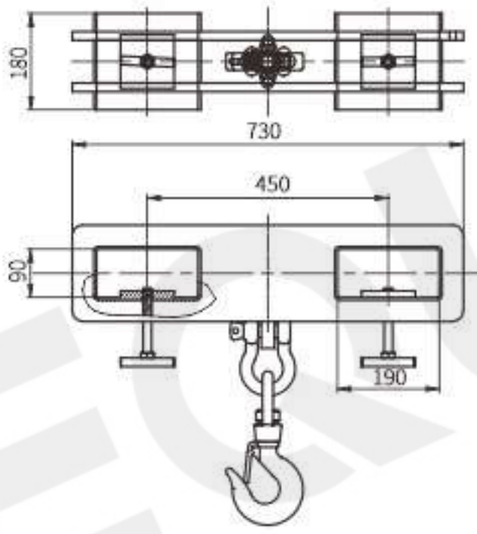

Model		MK5	MK10	MK25	MK40	Mk50
Load Capacity	kg	500	1000	2500	4000	5000
Net Weight	kg	6.5	14	20	40	39.5

Extension Fork

Type EX open-end extension fork sleeve

- ▲ Heavy-duty, high-strength, 8mm thick high-quality steel plate, strong and durable;
- ▲ Suitable for operating large or long pallets;
- ▲ The bottom is open type, easy to install;
- ▲ The end part is welded with steel snap ring to ensure that the extended fork will not slide during use;
- ▲ Sell by a pair (two pieces) .

Note: When there is no suitable product, we can tailor-make it for you.



Attention:

- ▲ The length of cargo fork after lengthening shall not exceed 150% of the length of the original cargo fork;
- ▲ It is recommended that the forklift truck be fitted with the harness with the written consent of the forklift truck manufacturer;
- ▲ The lengthened fork length shall not exceed 150% of the original fork length, that is, the lengthened fork length shall not be installed on the original fork length less than "the minimum fit fork length" ;
- ▲ The load decay curve of the forklift must be considered to ensure the safety
- ▲ Lengthening fork each beyond the original fork 25 mm, the load will be reduced according to the following theoretical data;

2000kg forklift:77kg/25mm

2300kg forklift: 73kg/25mm

2500kg forklift:70kg/25mm




Model	Length of Extension (mm)	Applicable Fork Width (mm)	Min. Applicable Fork Length (mm)	Net Weight (kg)
EX484	1219	100	813	35
EX604	1525	100	1017	44
EX724	1830	100	1220	53
EX824	2085	100	1390	60
EX844	2134	100	1423	62
EX964	2435	100	1623	70
EX485	1219	125	813	39
EX605	1525	125	1017	49
EX725	1830	125	1220	59
EX825	2085	125	1390	67
EX845	2134	125	1423	69
EX965	2435	125	1623	79
EX985	2485	125	1657	82
EX486	1219	150	813	43
EX606	1525	150	1017	53
EX726	1830	150	1220	64
EX826	2085	150	1390	66
EX846	2134	150	1423	75
EX966	2435	150	1623	85
EX986	2485	150	1657	88
EX1026	2590	150	1725	92

Horizontal Telescopic Fork Mounted Jibs

- Convert a forklift truck into a mobile crane to reach and transport long and awkward loads from inaccessible location;
- Vertify load center of forklift truck;
- With two locking screw and safety heavy chains to ensure fork not to shift or slip;
- Applicable fork sectional size ≤180×60mm(W×T);
- Supplied complete with one safety swivel hook with bow shackle & one rigid hook.





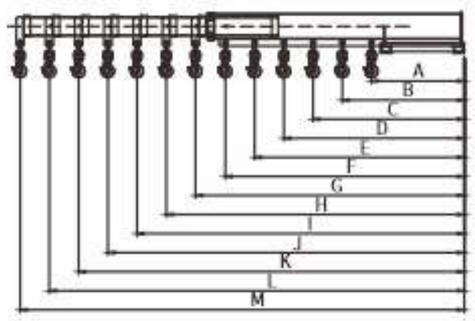


Model YLA01		A	B	C	D	E	F	G	H	I	J	K	L	M
Length Positions	mm	730	960	1190	1420	1650	1880	2115	2345	2575	2805	3035	3265	3495
Capacity	kg	3000	2280	1840	1542	1327	1164	1035	933	850	780	721	670	626
Fork opening	mm	284												
Fork pocket	mm	180×60												
Overall size(L×W×H)	mm	2150×660×325												
Net Weight	kg	180												

Dip-angle Telescopic Fork Mounted Jibs

- Convert a forklift truck into a mobile crane to reach and transport long and awkward loads from inaccessible location;
- Adjustable three dip-angle positions--0°, 13° and 26°;
- Vertify load center of forklift truck;
- With two locking screw and safety heavy chains to ensure fork not to shift or slip;
- Supplied complete with one safety swivel hook with bow shackle & one rigid hook.





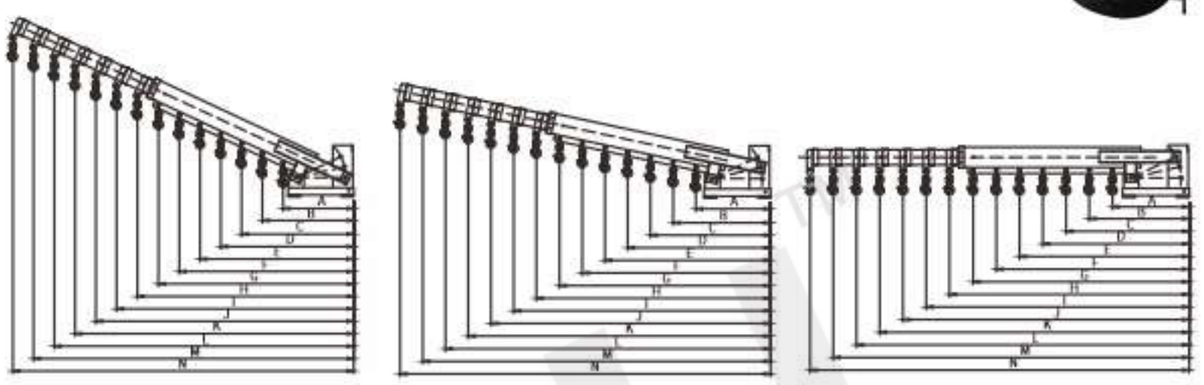


Model YLB01		A	B	C	D	E	F	G	H	I	J	K	L	M	N
0°	Length Positions mm	760	990	1220	1450	1680	1910	2140	2375	2605	2835	3065	3295	3525	3755
	Capacity kg	3000	2303	1869	1572	1357	1194	1065	960	875	804	744	692	647	607
13°	Length Positions mm	740	965	1190	1415	1640	1865	2090	2319	2544	2769	2994	3219	3444	3669
	Capacity kg	3081	2363	1916	1611	1390	1223	1091	983	896	823	762	708	662	621
26°	Length Positions mm	710	919	1127	1336	1544	1752	1961	2174	2382	2591	2799	3007	3216	3424
	Capacity kg	3211	2481	2023	1707	1477	1301	1163	1049	957	880	815	758	709	666
Fork opening	mm	166													
Fork pocket	mm	180×74													
Overall size(L×W×H)	mm	2410×540×525													
Net Weight	kg	210													


Dip-angle Telescopic rotatable fork mounted Jibs

- The lifting arm can adjust different rotation Angle in 5 different holes.The hook is rotatable with a safety latch。
- With two locking screw and safety heavy chains to ensure fork not to shift or slip;
- The adjustable telescopic super long lifting arm is suitable for the area where the forklift is not easy to enter for operation ,especially suitable for lifting long strip goods in containers with forklift.





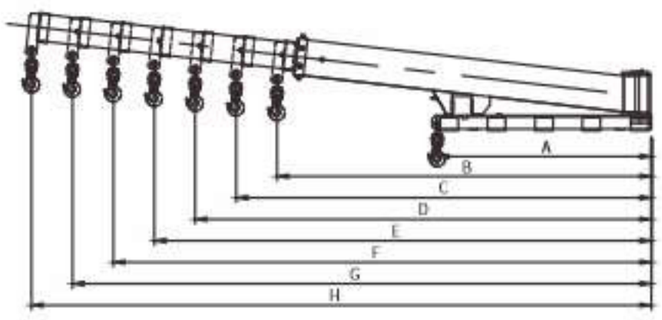

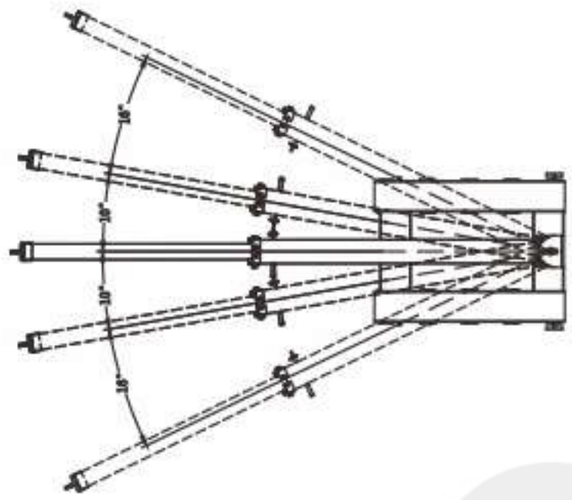









Model YLC01		A	B	C	D	E	F	G	H
Length Positions	mm	1195	2090	2319	2548	2776	3005	3233	3462
Capacity	kg	2000	1144	1031	938	861	795	739	690
Fork opening	mm	516							
Fork pocket	mm	180×65							
Overall size(L×W×H)	mm	2100×910×500							
Net Weight	kg	238							